

# PUMP STATION

## 70 GALLON FIBERGLASS LIFT STATION TANK


### STRONG FIBERGLASS DESIGN

This 70 gallon fiberglass tank is designed to be directly buried outside of the home. This tank can be used for collection of wastewater that will then be pumped using a submersible sewage, effluent, or grinder pump.

### DEFAULT TANK DIMENSIONS

- 28" Diameter x 52" Tall
- 70 Gallon Capacity
- 4" inlet hole with rubber grommet seal
- 2" or 1-1/2" outlet PVC hub (based on pump size)
- 28.5" from tank bottom to bottom of inlet
- 23.5" from tank access lid to bottom of inlet
- 30.5" from tank bottom to bottom of outlet
- 21.5" from tank access lid to bottom of outlet

Custom Inlet & Outlet Configurations Available

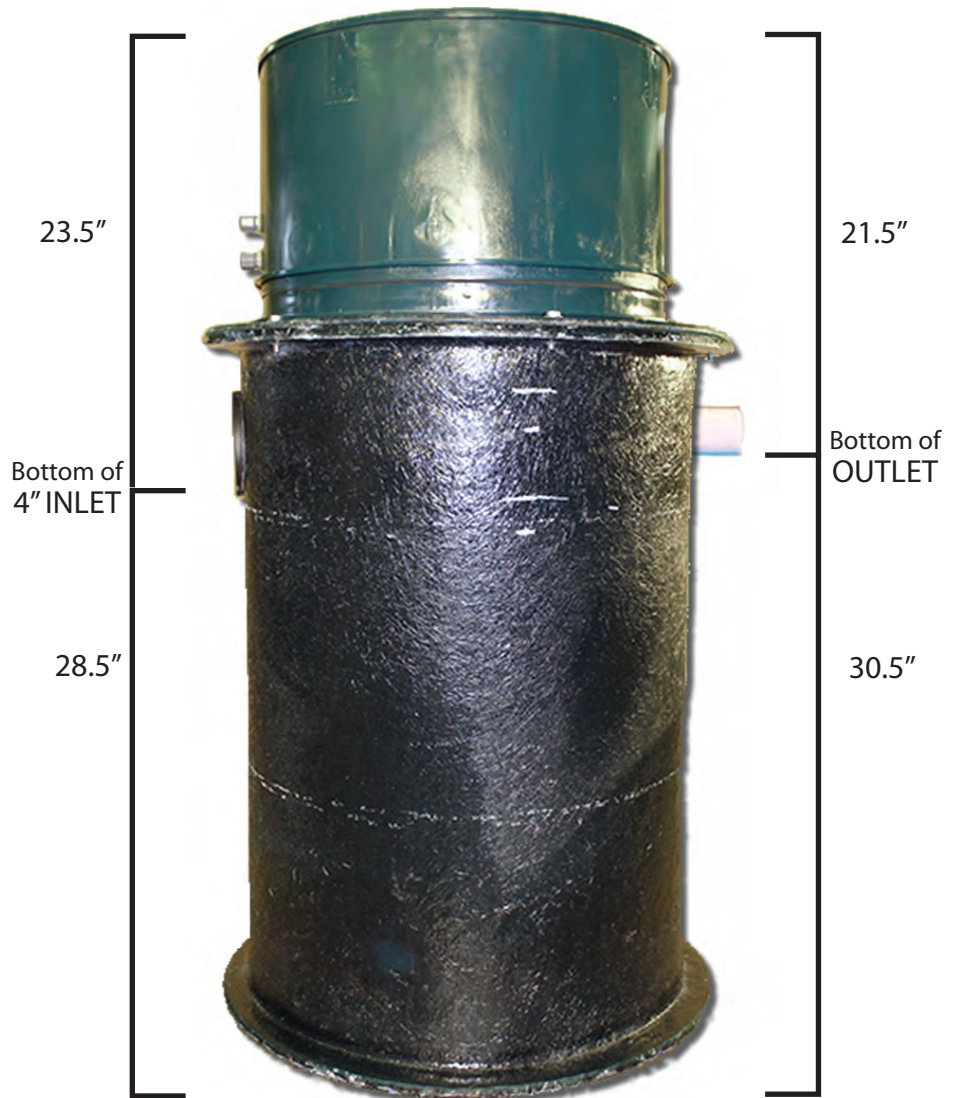

### RISERS AND HEAVY DUTY COVERS AVAILABLE



(877)-925-5132

[www.septicsolutions.com](http://www.septicsolutions.com)

## 9SC SERIES - 4/10 HP

### APPLICATIONS

Sewage and effluent wastewater transfer, dewatering

### FEATURES

- Permanent Split Capacitor (PSC)
- Energy-saving low amp draw
- Designed for continuous duty
- 2" FNPT (51 mm) discharge
- Handles solids up to 2" (51 mm) diameter
- Multiple switch options for automatic operation
- 140 °F (60 °C) liquid temperature rating
- cCSAus listed



### SERIES SPECIFICATIONS

Model	HP	Volts	Hz	Amps	Watts	Max. Water Temp.	GPM / Liters per Minute @ Height			Shut-Off	
							5 ft (1.5 m)	10 ft (3 m)	15 ft (4.6 m)	ft (m)	PSI (Bar)
9SC	4/10	115	60	8	870	140 °F (60 °C)	100 / 379	80 / 303	60 / 227	20 (6.1)	8.7 (0.60)

Item No.	Model	HP	Volts	Discharge	Switch Type / Operation	On Level	Off Level	Cord	Weight
509411	9SC-CIA-SFS	4/10	115	2"	Integral Snap-Action Float	10" - 13" 25 cm - 33 cm	5" - 8" 13 cm - 20 cm	20' 6.1 m	38.5 lbs 17.5 kg
509412	9SC-CIA-RF	4/10	115	2"	Piggyback Mechanical Float	16" - 19" 41 cm - 48 cm	9" - 11" 23 cm - 28 cm	20' 6.1 m	38.4 lbs 17.4 kg
509413	9SC-CIM	4/10	115	2"	Manual	-	-	20' 6.1 m	36 lbs 16.3 kg