

ALLEGIANCE

— TRUCKS® —

1/8/2024

Town of Castleton
PO Box 727
Castleton, VT. 05733

Dear Town of Castleton,

We are please to quote you on the following: (1) New 2024 International CV515 4x4 Cab & Chassis. Due to continued Supply Chain issues we have limited allocation for build slots for 2024. The CV is the only model that has slots currently available.



Detailed Specifications of the Cab & Chassis we are quoting are attached. Thank you for this opportunity. If you have any questions or concerns please contact me.

Thank You,

(1) New International Model CV515 4x4
Cab & Chassis:

\$ 86,223.00

AT Hoosick LLC

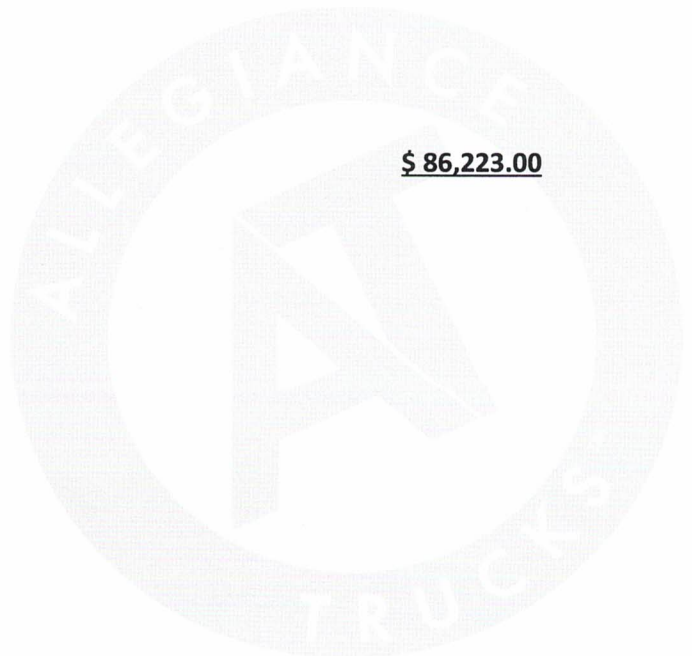



CV515 SFA


Sales Proposal For:
TOWN OF CASTLETON

Presented By:
ALLEGIANCE TRUCKS

Prepared For:
 TOWN OF CASTLETON
 BOB WARD
 PO BOX 727
 CASTLETON, VT 05733-
 (802)468 - 2459
 Reference ID: N/A

Presented By:
 ALLEGIANCE TRUCKS
 JEFF DELUREY
 PO BOX 61
 NORTH HOOSICK NY 121330061
 518-686-7389

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

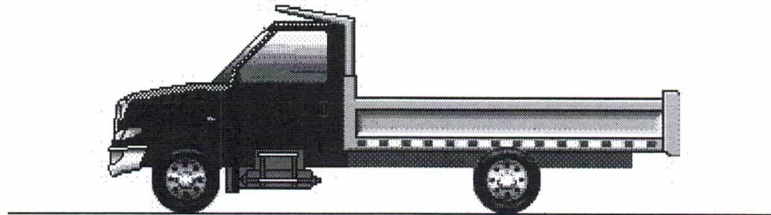

Model Profile
2024 CV515 SFA (CV515)

AXLE CONFIG: 4X4
APPLICATION: Landscape Dump
MISSION: Requested GVWR: 21000. Calc. GVWR: 22500. Calc. GCWR: 26000
 Calc. Start / Grade Ability: 39.78% / 3.22% @ 55 MPH
 Calc. Geared Speed: 103.2 MPH

DIMENSION: Wheelbase: 165.00, CA: 83.80, Axle to Frame: 63.00
ENGINE, DIESEL: {International 6.6} EPA 2024, 350HP @ 2500 RPM, 750 lb-ft Torque @ 1400 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)
TRANSMISSION, AUTOMATIC: {Allison 2700 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 26,000 GCW Max, On/Off Highway
AXLE, FRONT DRIVING: {Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting
AXLE, REAR, SINGLE: {Dana Spicer S16-130} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends Gear Ratio: 4.30
CAB: Conventional, Day Cab
TIRE, FRONT: (2) 225/70R19.5 Load Range G R02 PROFUEL DRIVE (PIRELLI), 643 rev/mile, 87 MPH, Drive
TIRE, REAR: (4) 225/70R19.5 Load Range G R02 PROFUEL DRIVE (PIRELLI), 643 rev/mile, 87 MPH, Drive
SUSPENSION, REAR, SINGLE: 15,500-lb Capacity, Vari-Rate Springs
PAINT: Cab schematic 100CX
 Location 1: 6815, Red-Blue Dark (Prem)
 Chassis schematic N/A

Description

Base Chassis, Model CV515 SFA with 165.00 Wheelbase, 83.80 CA, and 63.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

SKID PLATE Steel, Frame Mounted, Protects the Transfer Case from the Ground

AXLE CONFIGURATION {Navistar} 4x4

Notes

: Pricing may change if axle configuration is changed.

FRAME RAILS High Strength Low Alloy Steel (50,000 PSI Yield), Straight Top Flange with Contoured Bottom, Height Transitions from 7.375" (187.325mm) to 9.125" (231.775mm) to 7.625" (193.675mm); Width: 3.079" (78.21mm); Thickness: 0.3125" (7.94mm); 383.3" (9735.8mm) Max OAL

BUMPER, FRONT Contoured, Steel, Painted Gray

WHEELBASE RANGE 128" (325cm) Through and Including 183" (465cm)

AF RANGE 50" (128cm) Through and Including 75" (190cm)

AXLE, FRONT DRIVING {Dana Spicer 60-256} Single Reduction, 7,500-lb Capacity, with Hub Piloted Wheel Mounting

AXLE, FRONT DRIVING, LUBE {EmGard FE-75W-90} Synthetic Oil; 1 thru 29.99 Pints

SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 7,500-lb Capacity, with Shock Absorbers

STABILIZER BAR, FRONT

BRAKE SYSTEM, HYDRAULIC {Bosch} Split System, with Four Channel ABS, Traction Control, Electronic Stability Control, Hydromax Brake Booster with High Speed Master Cylinder and Trailer Sway Control

DUST SHIELDS, FRONT BRAKE for Hydraulic Brakes

DUST SHIELDS, REAR BRAKE for Hydraulic Brakes

BRAKE, PARKING {Bosch} DSSA Type, 12" x 3"; for Hydraulic Brake Chassis; Foot Operated in Cab; Differential Mounted

BRAKES, FRONT {Meritor Quadrauc} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 8,000-lb Capacity

BRAKES, REAR {Meritor Quadrauc} Hydraulic Disc Type, with Four 64mm Diameter Pistons, 15,500-lb Capacity per Axle

STEERING COLUMN Tilting

STEERING WHEEL 4-Spoke; 15" Dia., Black, Leather Wrapped

STEERING GEAR {Bosch S2 8014 Plus} Power

DRIVELINE SYSTEM {Dana Spicer} SPL100 Main Driveline, Direct Mount Transfer Case to Transmission, SPL70 Driveline to Front Axle, for 4x4

EXHAUST SYSTEM Horizontal Dual Aftertreatment System, Frame Mounted Under Right Rail, for Single Horizontal Tail Pipe

ENGINE EXHAUST BRAKE for International 6.6 Engine

MANUAL REGEN Capability

ELECTRICAL SYSTEM 12-Volt for CV Model

Includes

: HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover

: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever

: PARKING LIGHT PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light

: TURN SIGNALS, FRONT Includes Reflectors and Solid State Flashers; Flush Mounted

: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature, Integral with Turn Signal Lever

HORN, ELECTRIC (2) Trumpet Style

Description

DEFROSTER, REAR WINDOW Electric

ALTERNATOR {Denso SC6} Brush Type, 12 Volt, 220 Amp Capacity

TRAILER BRAKE CONTROL Integrated

BODY BUILDER WIRING Back of Day Cab at Left Frame or Under Crew Cab at Left Frame; Includes One Sealed Connector for Separate Ground/Backup/Left and Right Hand Turn, Left and Right Hand Tail/Stop/Accessory Power and Combined for Left and Right Hand Stop/Turn

BATTERY SYSTEM {VARTA} Maintenance-Free, (2) 12-Volt 1300CCA Total, Top Threaded Stud

RADIO AM/FM/Bluetooth/USB Input/Auxiliary Input/SD Card Slot, with 8" Color Touch Panel Display, Voice Activated Technology, Satellite Radio Compatible

COMPACT DISC PLAYER with MP3

SPEAKERS (6)

TRAILER CONNECTION SOCKET Mounted at Rear of Frame, Wired for Turn Signals Combined with Stop, Compatible with Trailers with Combined Stop, Tail, Turn Lamps

STOP, TURN, TAIL & B/U LIGHTS Multi-Function, Sealed, Incandescent Stop, Turn and Tail Lights, Backup Lights with Rear Reflex Reflector, Includes License Plate Light

AUXILIARY HARNESS "Y" Harness for Auxiliary Front Head Lights (High/Low Beam), Marker Lights, and Turn Signals for Front Plow Applications

SPECIAL WIRING HARNESS, BODY to Connect to Instrument Panel Electrical Center (ICEM) Connector X7, Provides Blunt Cuts for Standard Terminals 8, 11, 7, 17, 10, 19 Signals, Optional Terminals 1, 4, 14, 20 Signals

BATTERY BOX Steel, with Plastic Cover, 2 Battery Capacity, Parallel to Rail, 28" Wide, Mounted Left Side Under Cab

SWITCH, TOGGLE, FOR WORK LIGHT Lighted; on Instrument Panel and Wiring Effects for Customer Furnished End of Frame Light

HEADLIGHTS Halogen, Composite Aero Design, Chrome Trim Bezel, with Daytime Running Lights

SWITCH, AUXILIARY 1 to 4 Latching Switches with 30-Amp Fuses

CLEARANCE/MARKER LIGHTS (5) Amber LED Lights, Flush Mounted on Cab

STARTING MOTOR 12 Volt

SWITCH, TOGGLE, ROOF WORKLIGHT Lighted; in Overhead Console and Wiring Effects for Customer Furnished Roof Mounted Light

TOGGLE SWITCH, AUXILIARY (6) with 20-Amp Fuses, Maximum of 200 Amp. Load, Accessory Controlled, with Switches in Headliner

LOGOS EXTERIOR Model Badges

GRILLE Chrome, with Chrome Headlight Bezels

RADIATOR STONE GUARD Mounted to Front Bumper

BUG SCREEN Mounted Behind Grille

FRONT END Tilting, Fiberglass, with Three Piece Construction

FENDER EXTENSIONS Painted

PAINT SCHEMATIC, PT-1 Single Color, Design 100

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

PAINT CLASS Premium Color

PROMOTIONAL PACKAGE Government Silver Package

VEHICLE REGISTRATION IDENTITY ID for Other State

Description**Notes**

: CANNOT BE REGISTERED IN CALIFORNIA. For vehicles that will be registered in States other than California.

SNOW PLOW PREP PACKAGE Includes Wiring for Roof Mounted Light

GVWR WEIGHT CLASSIFICATION Class 6 (19,501-26,000 lbs)

ENGINE, DIESEL {International 6.6} EPA 2024, 350HP @ 2500 RPM, 750 lb-ft Torque @ 1400 RPM, 2900 RPM Governed Speed, 350 Peak HP (Max)

FAN DRIVE Viscous Type, Screw On, Rear Tether, Electronically Controlled

AIR CLEANER Single Element, with Water Separator

EMISSION, CALENDAR YEAR {International 6.6} EPA, OBD and GHG Certified for Calendar Year 2024

THROTTLE, HAND CONTROL Engine Speed Control for PTO; Electronic Controlled, On/Off Switch Mounted on Dash, with Steering Wheel Button Control

GOVERNOR Electronic Road Speed Type; with 75 MPH Default

CARB IDLE COMPLIANCE Low NOx Idle Engine, Complies with California Clean Air Regulations; Includes "Certified Clean Idle" Decal on Hood

BLOCK HEATER, ENGINE 120V/800W

CARB EMISSION WARR COMPLIANCE for International 6.6 Engines

RADIATOR Aluminum, 3-Row, Down Flow, Front to Back System, 730 SqIn Louvered, with 578 SqIn Charge Air Cooler, Includes In-Tank Oil Cooler

TRANSMISSION, AUTOMATIC {Allison 2700 RDS} 6th Generation Controls, Close Ratio, 6-Speed with Double Overdrive, with PTO Provision, Less Retarder, Includes Park Pawl, with 23,500-lb GVW and 26,000 GCW Max, On/Off Highway

TRANSFER CASE {Meritor MTC-3203} 2-Speed, Gear Drive, 3,000 lb-ft Torque Rating, Less PTO Provision, Electric Shift Control

Notes

: Transfer Case Includes 40W Synthetic Lube

PTO ACCOMMODATION PKG Includes Flex Section on Transmission Oil Cooler Lines to Enable PTO Lube Plumbing

TRANSMISSION FEATURE EFFECTS for Allison, Disable Engine Shutdown When in PTO Mode, for Utility Bucket Lift Applications

NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released

SHIFT CONTROL PARAMETERS {Allison} 1000 or 2000 Series Transmissions, Performance Programming

PTO LOCATION Customer Intends to Install PTO at Left Side of Transmission

DIFFERENTIAL, LOCKING {Dana Spicer Trac-Lok} Torque Proportioning Limited Slip

AXLE, REAR, SINGLE {Dana Spicer S16-130} Single Reduction, 15,500-lb Capacity, 190 Wheel Ends . Gear Ratio: 4.30

SUSPENSION, REAR, SINGLE 15,500-lb Capacity, Vari-Rate Springs

SHOCK ABSORBERS, REAR (2)

FUEL TANK Top Draw. Plastic, Rectangular, 17" Tank Depth, 25 US Gal (95L). Includes Auxiliary Draw Port and Fuel Filler Assembly, Mounted Between Frame Rails and Forward of Rear Axle

DEF TANK 6.75 US Gal (26L) Capacity, Frame Mounted Outside Right Rail, Under Cab

CAB Conventional, Day Cab

Includes

: CAB DOOR LOCKS Power Door Locks All Doors

: DOME LIGHT, CAB with OFF/DOOR/ON Settings; Located in Overhead Console

Description

: READING LIGHT, CAB Located in Overhead Console

: STEP (2) One Per Door

: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door

MIRROR, INSIDE REAR VIEW with Manual Tilt

GLASS, ALL WINDOWS Solar Absorbing, Tint

COLOR, INTERIOR Dark Ash

GAUGE CLUSTER English Speedometer, Includes English Odometer; Includes 4.2" Color Display with Personalization, Warning Messages and Vehicle Information

SEAT, DRIVER High Back with Integral Headrest, 10-Way Power Adjustable, Vinyl, Power Lumbar

SEAT, TWO-MAN PASSENGER High Back with Integral Headrest in Outboard Position, Center Fold-Down Armrest with Storage, Vinyl, with Recline

MIRRORS (2) Manual Folding and Extending, Power Adjust, Heated, Turn Signal Indicator Located in Mirror, Bright Heads and Arms, for 96" Load Width

CAB INTERIOR TRIM Classic, for Day Cab

Includes

: SUN VISOR (2) Vinyl

WINDOW, POWER (2) in Left and Right Doors

AIR BAG, FRONT, DRIVER SIDE

AIR BAG, FRONT, PASSENGER SIDE

AIR BAG, SIDE, DRIVER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE, PASSENGER Seat Mounted, Outboard Side-Impact Airbag

AIR BAG, SIDE CURTAIN Roof Mounted, for Front and Rear Outboard Seating Positions for Driver and Passenger Sides

AIR CONDITIONER with Heater, Single Zone

WHEELS, FRONT {Alcoa 76543} DISC; 19.5x6.75 Rims, Mirror Polish Aluminum, 8-Stud, 275mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs

WHEELS, REAR {Alcoa 76543} DUAL DISC; 19.5" Mirror Polish Aluminum Outer and Inner Wheel, 8-Stud (275MM BC) Hub Piloted, Flanged Nut, Metric Mount, 6.75 Rims; with Steel Hubs

COATING IDENTITY, REAR WHEELS {Alcoa Dura-Bright XBR/EVO} Disc Rear Wheels, Aluminum, with Vendor Applied Treatment, Not for Super Single/Wide Base

COATING IDENTITY, FRONT WHEELS {Alcoa Dura-Bright XBR/EVO} Disc Front Wheels, Aluminum, with Vendor Applied Treatment, Not for Wide Base

(2) TIRE, FRONT 225/70R19.5 Load Range G R02 PROFUEL DRIVE (PIRELLI), 643 rev/mile, 87 MPH, Drive

(4) TIRE, REAR 225/70R19.5 Load Range G R02 PROFUEL DRIVE (PIRELLI), 643 rev/mile, 87 MPH, Drive

Cab schematic 100CX

Location 1: 6815, Red-Blue Dark (Prem)

Chassis schematic N/A

Services Section:

WARRANTY Standard for CV515, Effective with Vehicles Built December 3, 2018 or Later, CTS-3000A

(US DOLLAR)

Description

Price

Net Sales Price:

\$86,223.00

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.

The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.